


F4-9W-240

Mitsi 4

24V LED Flexible Strip ::::: 4mm · 9.6W/m · 90+ CRI

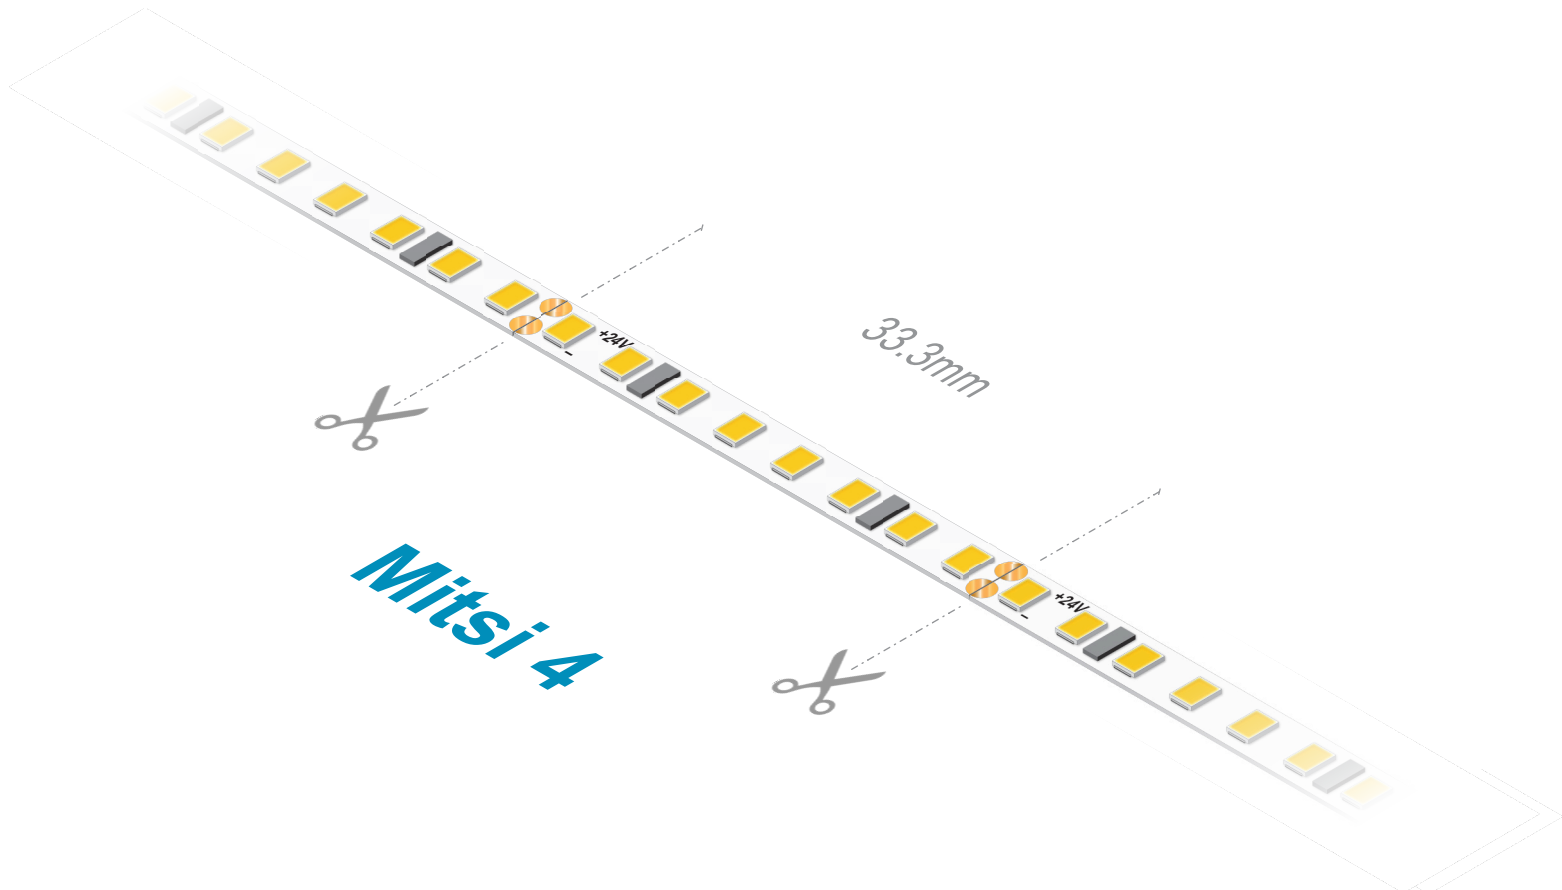

Features

- 9.6 W/m
- High Density – 240 LEDs/m
- Flexible 4mm Circuit Board
- Colour Temperatures:
2700K, 3000K, 4000K
- High Colour Rendering — 90+ CRI
- 24 Volt DC
- 5 Year Warranty

Applications

- The extra slim 4mm LED strip fits into most narrow mounting extrusions
- High LED density ensures dotless appearance even in shallow extrusion profiles
- The narrow LED strip makes it ideal for use in furniture, accent lights, under steps staircases illumination, integration into handrails etc.

Physical

Dimension	
Strip width	4 mm
Cuttable length (min.)	33.3 mm
Roll length	5 m
Material	
Strip base	Flexible Circuit Board
Back	3M Adhesive
Ingress rating	IP20



Electrical

Connection	
Solder pads	2: [+] [-]
Component	
Light source(s)	2216 LED
Source density	240 LED/m
Performance	
Voltage	24 V
Current	~400 mA/m
Power (per metre)	9.6W/m

Photometric

Output	
Lumens	1111-1262 lm/m
Beam angle	120 °
Colour	
Rendering	90+ CRI
Matching	<3 SDCM
Options	
Colour Temperatures	2700K, 3000K, 4000K

Optical

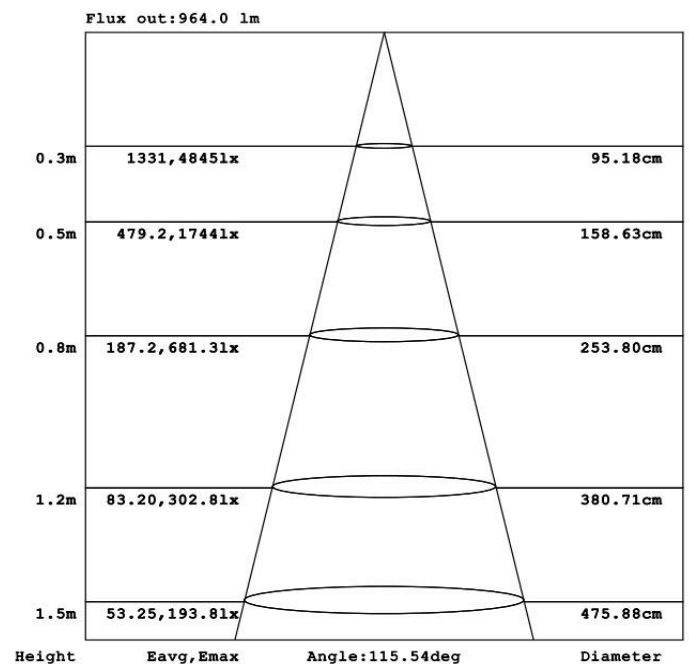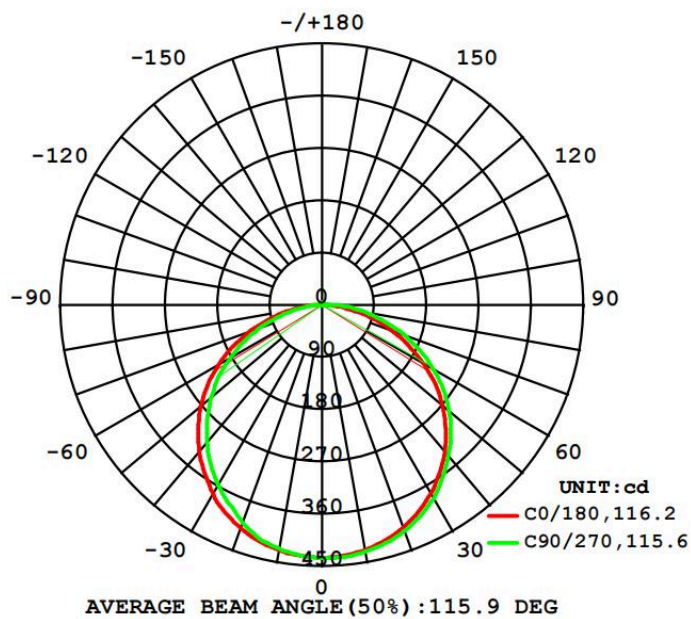

Installation

- Do NOT turn LED strip on while rolled up on the spool!
- Install on clean and dry surface
- Install on heat sinking aluminium extrusion
- Maximum continuous run per power injection: 3m
- Maximum bending radius: 3cm
- Do not twist LED strip