


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:229.26V I:0.3235A P:71.723W PF:0.9671 Freq:49.99Hz Lamp Flux:9184.78x1 lm		
NAME: Compo 900 75W NW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 128.06 lm/W
MODEL		I _{max} (cd)	4047	S/MH(C0/180)		1.25
NOMINAL POWER(W)	75	LOR(%)	100.0	S/MH(C90/270)		1.24
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	9184.8	η UP,DN(C0-180)		0.2,49.2
NOMINAL FLUX(lm)	9184.78	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.2,50.5
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM		1.25
TEST VOLTAGE(V)	229.5	η down(%)	99.7	CIBSE SHR MAX		1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

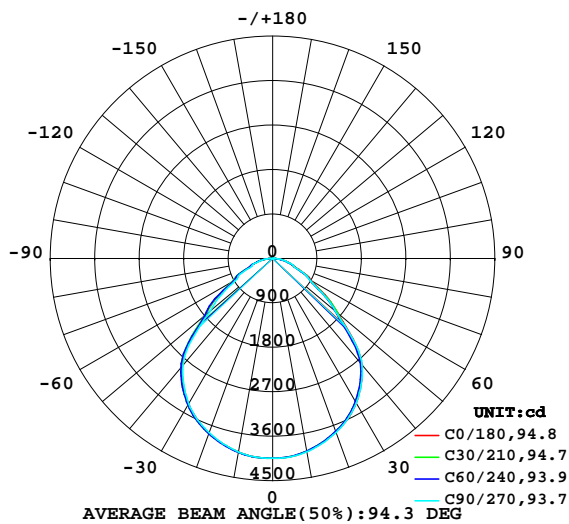

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

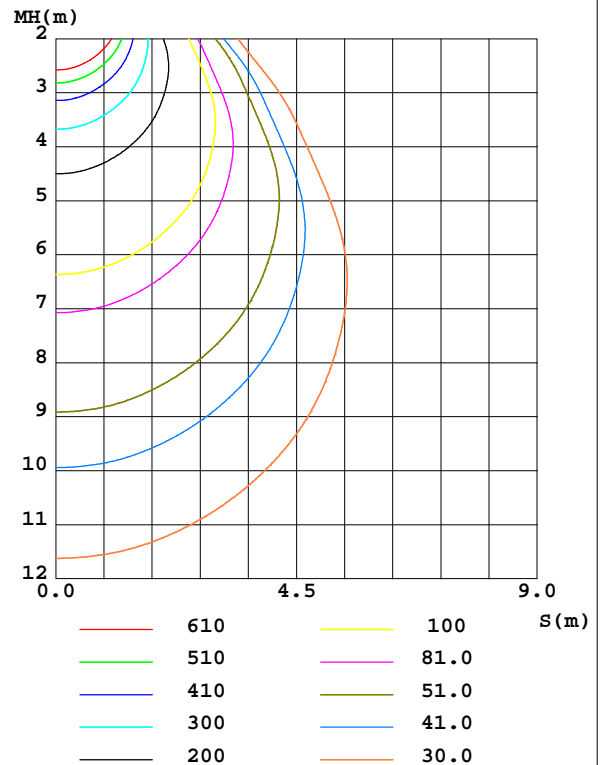

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM
ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	3969	3962	3977	3973	3979	3987	3978	3979	0- 10	383.1	383.1	4.17,4.17
20	3744	3729	3750	3748	3762	3776	3754	3756	10- 20	1095	1478	16.1,16.1
30	3383	3350	3385	3380	3404	3428	3395	3398	20- 30	1656	3133	34.1,34.1
40	2812	2772	2816	2811	2857	2886	2829	2835	30- 40	1957	5090	55.4,55.4
50	1721	1685	1663	1687	1793	1796	1654	1677	40- 50	1760	6850	74.6,74.6
60	903.7	870.5	853.7	873.6	923.3	940.5	842.1	863.3	50- 60	1149	7999	87.1,87.1
70	450.2	450.3	455.1	455.4	482.7	482.8	442.6	448.3	60- 70	671.8	8671	94.4,94.4
80	222.6	198.9	225.2	221.5	237.5	251.2	227.3	227.6	70- 80	370.7	9042	98.4,98.4
90	1.322	1.302	1.227	1.300	1.930	8.179	1.608	1.732	80- 90	114.3	9156	99.7,99.7
100	2.394	2.424	2.266	2.289	2.498	2.435	2.472	2.474	90-100	2.081	9158	99.7,99.7
110	4.004	4.019	3.807	3.856	3.984	3.904	3.958	3.928	100-110	3.312	9161	99.7,99.7
120	5.377	5.365	5.194	5.333	5.349	5.280	5.331	5.301	110-120	4.637	9166	99.8,99.8
130	5.954	5.859	5.780	5.950	5.721	5.822	5.841	5.824	120-130	5.066	9171	99.8,99.8
140	6.108	5.914	5.882	6.076	5.725	5.900	5.907	5.896	130-140	4.565	9176	99.9,99.9
150	6.407	6.172	6.276	6.437	6.035	6.234	6.247	6.241	140-150	3.806	9179	99.9,99.9
160	6.511	6.315	6.563	6.557	6.213	6.495	6.475	6.501	150-160	2.947	9182	100,100
170	6.659	6.420	6.674	6.563	6.530	6.848	6.791	6.558	160-170	1.848	9184	100,100
180	6.702	6.633	6.768	6.713	6.706	6.632	6.766	6.711	170-180	0.6344	9185	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

Conical surface Flux(90deg): 6049.8 lm
%lum = 65.9%
%lamp = 65.9%
Conical surface Flux(130deg): 8388.6 lm
%lum = 91.3%
%lamp = 91.3%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:229.26V I:0.3235A P:71.723W PF:0.9671 Freq:49.99Hz
Lamp Flux:9184.78x1 lm

NAME: Compo 900 75W NW

TYPE:

WEIGHT:

SPEC.:

DIM.:

SERIAL No.:


MFR.: PURATI PTY LTD

SUR.:

Shielding Angle:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

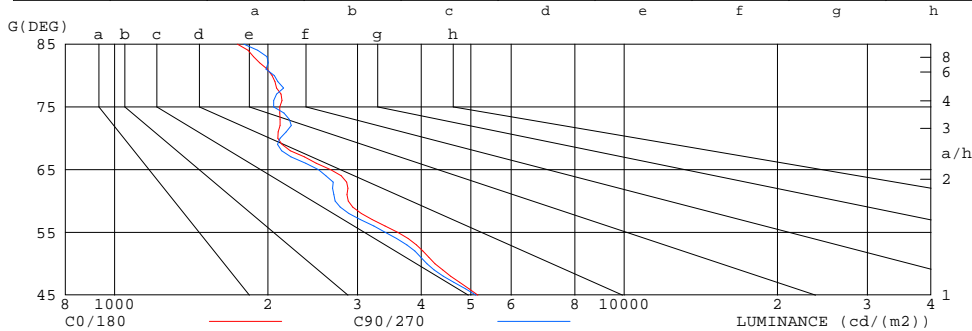

LUMINANCE cd/(m2)

G(DEG)	C0/180	C90/270
85	1743	1795
80	2038	2058
75	2108	2054
70	2092	2112
65	2654	2514
60	2873	2710
55	3597	3399
50	4255	4106
45	5167	5120


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.26V I:0.3235A P:71.723W PF:0.9671 Freq:49.99Hz Lamp Flux:9184.78x1 lm		
NAME: Compo 900 75W NW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.97	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.88	.83	.92	.87	.82	.89	.84	.80	.85	.82	.78	.82	.79	.76	.74
3.0	.84	.77	.71	.82	.76	.70	.79	.74	.69	.77	.72	.68	.74	.70	.66	.64
4.0	.75	.67	.61	.74	.67	.61	.72	.65	.60	.69	.64	.59	.67	.62	.58	.56
5.0	.68	.60	.54	.67	.59	.53	.65	.58	.53	.63	.57	.52	.61	.56	.52	.50
6.0	.62	.53	.47	.61	.53	.47	.59	.52	.47	.57	.51	.46	.56	.50	.46	.44
7.0	.56	.48	.42	.55	.48	.42	.54	.47	.42	.53	.46	.42	.51	.46	.41	.39
8.0	.52	.44	.38	.51	.43	.38	.50	.43	.38	.48	.42	.37	.47	.42	.37	.35
9.0	.48	.40	.35	.47	.39	.34	.46	.39	.34	.45	.39	.34	.44	.38	.34	.32
10.0	.44	.36	.31	.43	.36	.31	.42	.36	.31	.42	.35	.31	.41	.35	.31	.29

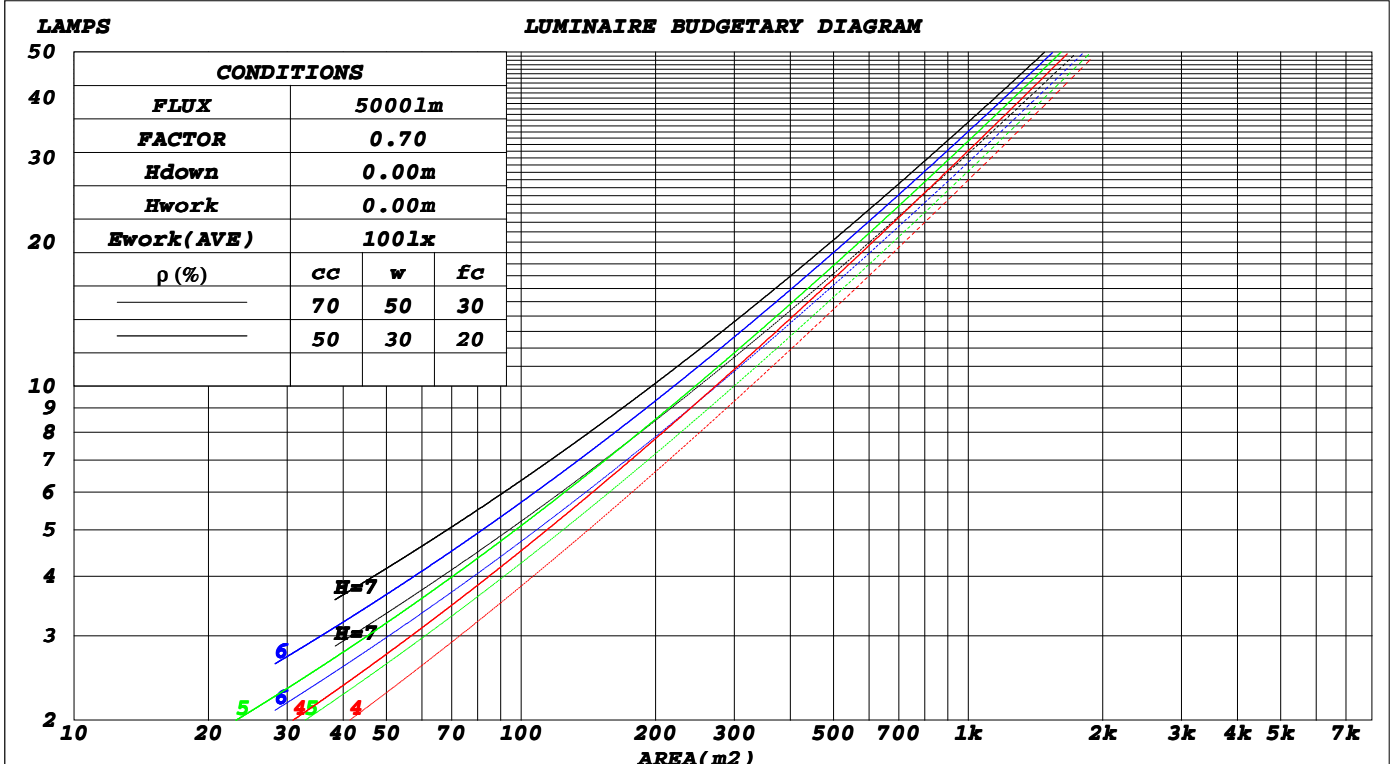

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr.Ma
Test Date: 2023-08-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:229.26V I:0.3235A P:71.723W PF:0.9671 Freq:49.99Hz Lamp Flux:9184.78x1 lm		
NAME: Compo 900 75W NW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0														
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
ρ_{fc}	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.269	.153	.048	.262	.150	.047	.249	.143	.046	.237	.137	.044	.226	.131	.042															
2.0	.256	.141	.043	.250	.138	.042	.239	.133	.041	.228	.128	.040	.218	.123	.039															
3.0	.240	.128	.038	.235	.126	.038	.225	.122	.037	.216	.118	.036	.207	.115	.035															
4.0	.225	.117	.034	.220	.115	.034	.211	.112	.033	.203	.109	.033	.195	.106	.032															
5.0	.210	.107	.031	.206	.106	.031	.198	.103	.030	.190	.100	.030	.184	.098	.029															
6.0	.197	.099	.028	.193	.097	.028	.186	.095	.028	.179	.093	.027	.173	.091	.027															
7.0	.185	.091	.026	.181	.090	.026	.175	.088	.025	.169	.087	.025	.163	.085	.025															
8.0	.174	.085	.024	.171	.084	.024	.165	.082	.024	.160	.081	.023	.155	.079	.023															
9.0	.164	.079	.022	.161	.079	.022	.156	.077	.022	.151	.076	.022	.147	.074	.022															
10.0	.155	.074	.021	.152	.074	.021	.148	.072	.020	.143	.071	.020	.139	.070	.020															

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.159	.140	.154	.136	.120	.105	.094	.083	.061	.054	.048	.019	.017	.016	
2.0	.170	.135	.105	.146	.116	.091	.100	.080	.063	.058	.047	.037	.018	.015	.012	
3.0	.161	.117	.081	.138	.101	.070	.095	.070	.049	.055	.041	.029	.018	.013	.010	
4.0	.153	.103	.064	.132	.089	.056	.090	.062	.039	.052	.036	.023	.017	.012	.008	
5.0	.146	.092	.053	.125	.080	.046	.086	.056	.032	.050	.033	.019	.016	.011	.006	
6.0	.139	.084	.044	.119	.072	.038	.082	.051	.027	.048	.030	.016	.015	.010	.005	
7.0	.133	.077	.038	.114	.067	.033	.079	.047	.023	.046	.027	.014	.015	.009	.005	
8.0	.126	.071	.033	.109	.061	.029	.075	.043	.020	.044	.025	.012	.014	.008	.004	
9.0	.121	.066	.029	.104	.057	.025	.072	.040	.018	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.026	.100	.054	.023	.069	.038	.016	.040	.022	.010	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:229.26V I:0.3235A P:71.723W PF:0.9671 Freq:49.99Hz Lamp Flux:9184.78x1 lm										
NAME: Compo 900 75W NW					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: PURATI PTY LTD					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.0	10.4	9.3	10.6	10.8	8.8	10.2	9.1	10.4	10.6
3H	9.7	10.9	10.0	11.2	11.4	9.5	10.7	9.8	11.0	11.2
4H	10.0	11.2	10.3	11.5	11.7	9.8	11.0	10.1	11.3	11.5
6H	10.3	11.4	10.6	11.7	12.0	10.1	11.3	10.5	11.5	11.8
8H	10.4	11.5	10.7	11.8	12.1	10.3	11.4	10.6	11.6	11.9
12H	10.5	11.5	10.8	11.8	12.1	10.3	11.4	10.7	11.7	12.0
4H 2H	9.2	10.4	9.5	10.7	10.9	9.0	10.3	9.4	10.5	10.8
3H	10.1	11.1	10.4	11.4	11.7	9.9	11.0	10.3	11.3	11.6
4H	10.6	11.5	10.9	11.8	12.2	10.4	11.4	10.8	11.7	12.0
6H	11.0	11.8	11.4	12.2	12.6	10.9	11.7	11.3	12.1	12.4
8H	11.2	11.9	11.6	12.3	12.7	11.0	11.8	11.4	12.2	12.6
12H	11.3	12.0	11.7	12.4	12.8	11.2	11.9	11.6	12.3	12.7
8H 4H	10.7	11.5	11.1	11.9	12.2	10.6	11.3	11.0	11.7	12.1
6H	11.3	11.9	11.7	12.3	12.8	11.1	11.8	11.6	12.2	12.6
8H	11.5	12.1	12.0	12.5	13.0	11.4	12.0	11.8	12.4	12.8
12H	11.7	12.2	12.1	12.6	13.1	11.6	12.1	12.1	12.5	13.0
12H 4H	10.7	11.4	11.1	11.8	12.2	10.6	11.3	11.0	11.7	12.1
6H	11.3	11.9	11.8	12.3	12.8	11.2	11.7	11.6	12.2	12.6
8H	11.6	12.1	12.0	12.5	13.0	11.5	11.9	11.9	12.4	12.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.5 / - 0.5					+ 0.5 / - 0.6				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.9 / - 0.7					+ 1.0 / - 0.8				

CIE Pub.117, 9185 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 7.7$)
Area: 0.63 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:229.26V I:0.3235A P:71.723W PF:0.9671 Freq:49.99Hz Lamp Flux:9184.78x1 lm		
NAME: Compo 900 75W NW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	64	53	47	63	53	47	62	52	47	41
0.80	74	63	57	73	63	57	71	62	56	50
1.00	82	72	66	81	72	65	79	73	65	59
1.25	88	79	73	87	79	73	85	77	72	65
1.50	93	84	78	91	84	78	89	82	77	70
2.00	99	92	86	97	90	85	94	88	84	77
2.50	102	95	90	100	94	89	96	91	87	80
3.00	105	99	94	103	98	93	99	95	91	83
4.00	108	103	99	106	102	98	102	98	95	87
5.00	110	106	103	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:229.26V I:0.3235A P:71.723W PF:0.9671 Freq:49.99Hz Lamp Flux:9184.78x1 lm		
NAME: Compo 900 75W NW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

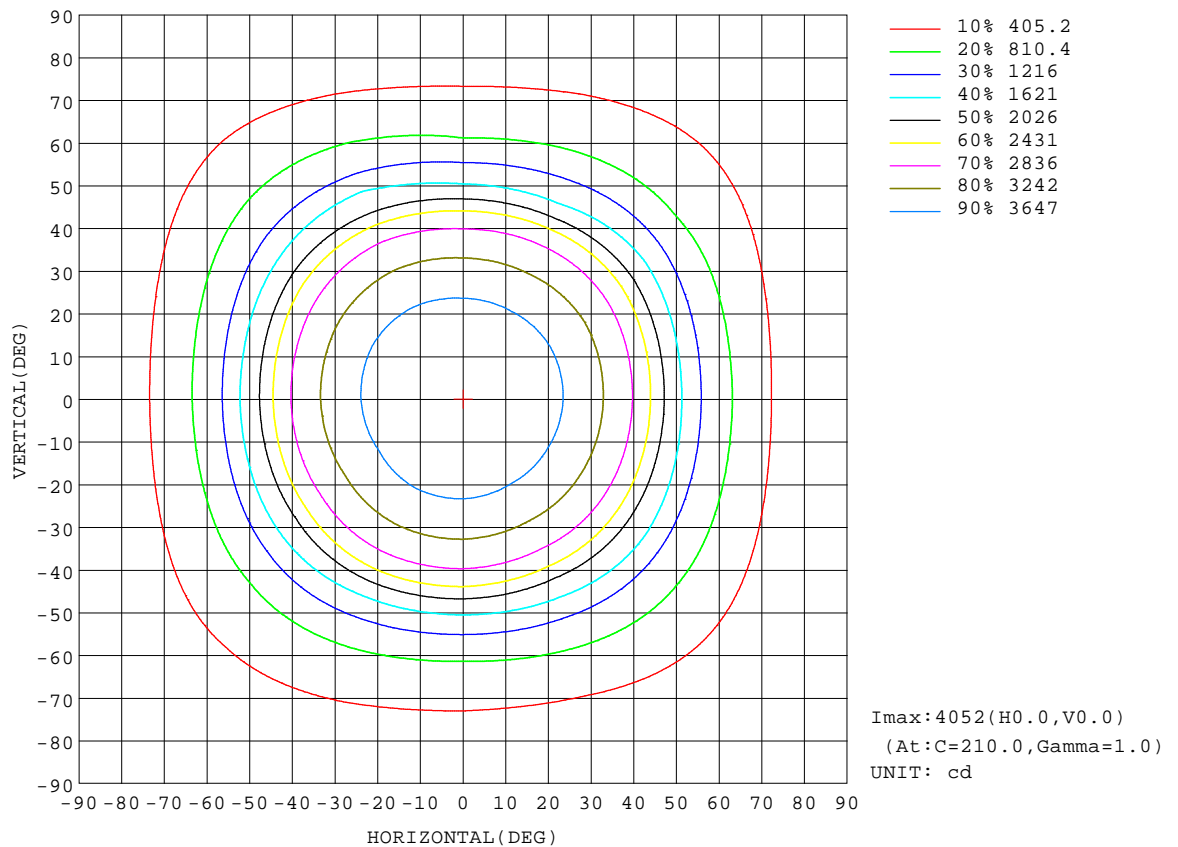


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

AAI Figure

Test:U:229.26V I:0.3235A P:71.723W PF:0.9671 Freq:49.99Hz Lamp Flux:9184.78x1 lm		
NAME: Compo 900 75W NW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

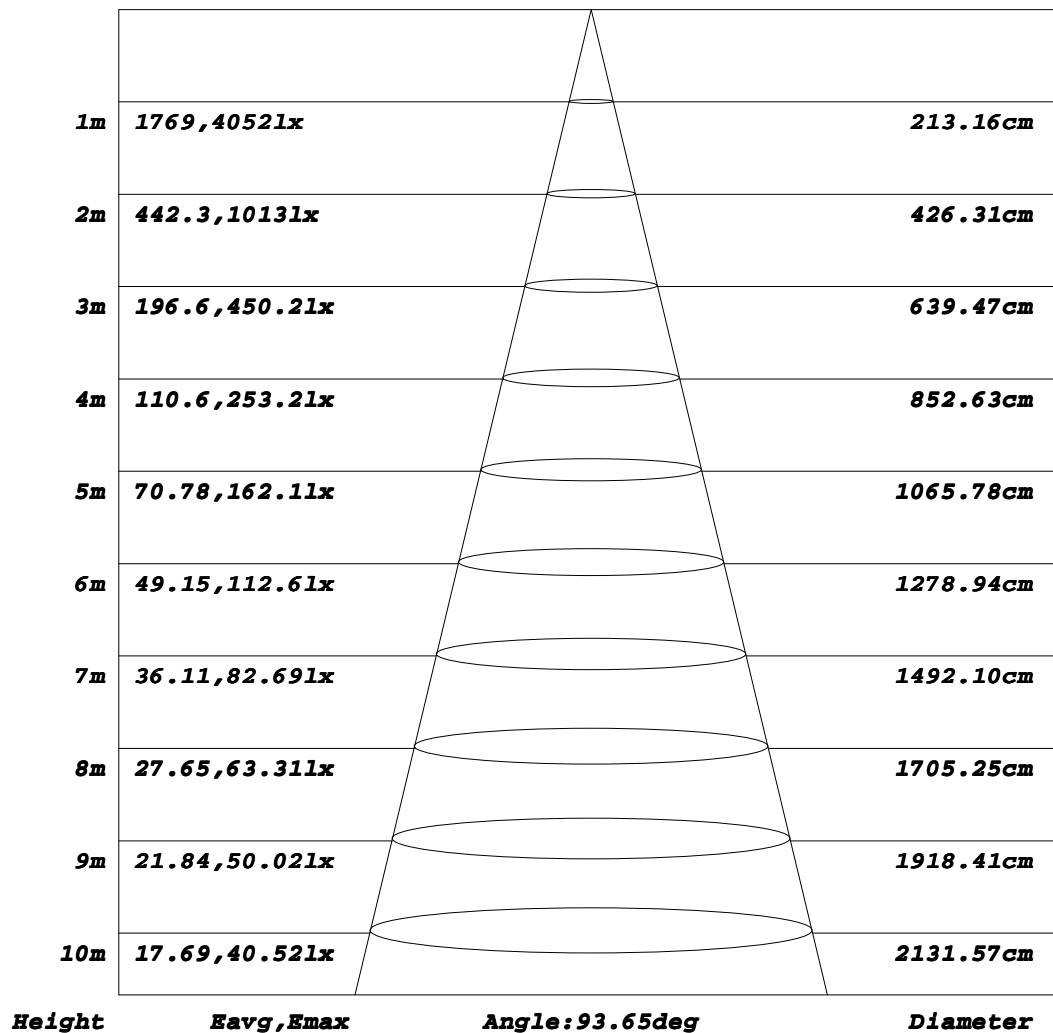Flux out:6392 lm


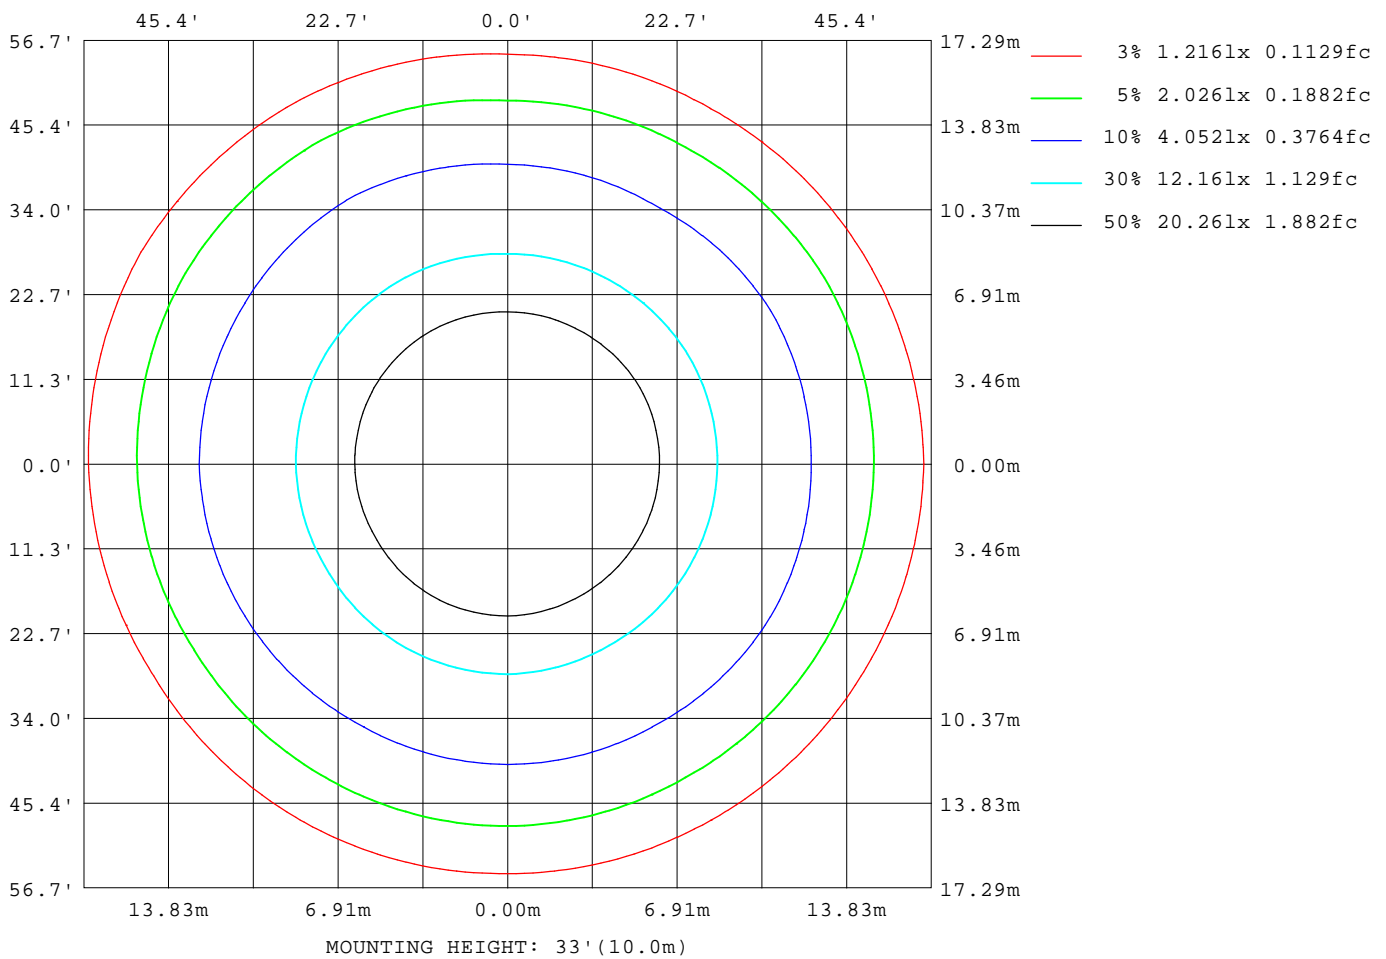
Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr.Ma
Test Date: 2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:229.26V I:0.3235A P:71.723W PF:0.9671 Freq:49.99Hz Lamp Flux:9184.78x1 lm		
NAME: Compo 900 75W NW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:



C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr. Ma
Test Date: 2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:229.26V I:0.3235A P:71.723W PF:0.9671 Freq:49.99Hz Lamp Flux:9184.78x1 lm		
NAME: Compo 900 75W NW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2725
L_0~180(75)av	2149
L_0~180(85)av	1897
L_90~270(65)av	2553
L_90~270(75)av	2061
L_90~270(85)av	1855
L_45(65)av	2619
L_45(75)av	2116
L_45(85)av	1880

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: Mr.Ma
Test Date: 2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

Planar Illuminance Curve

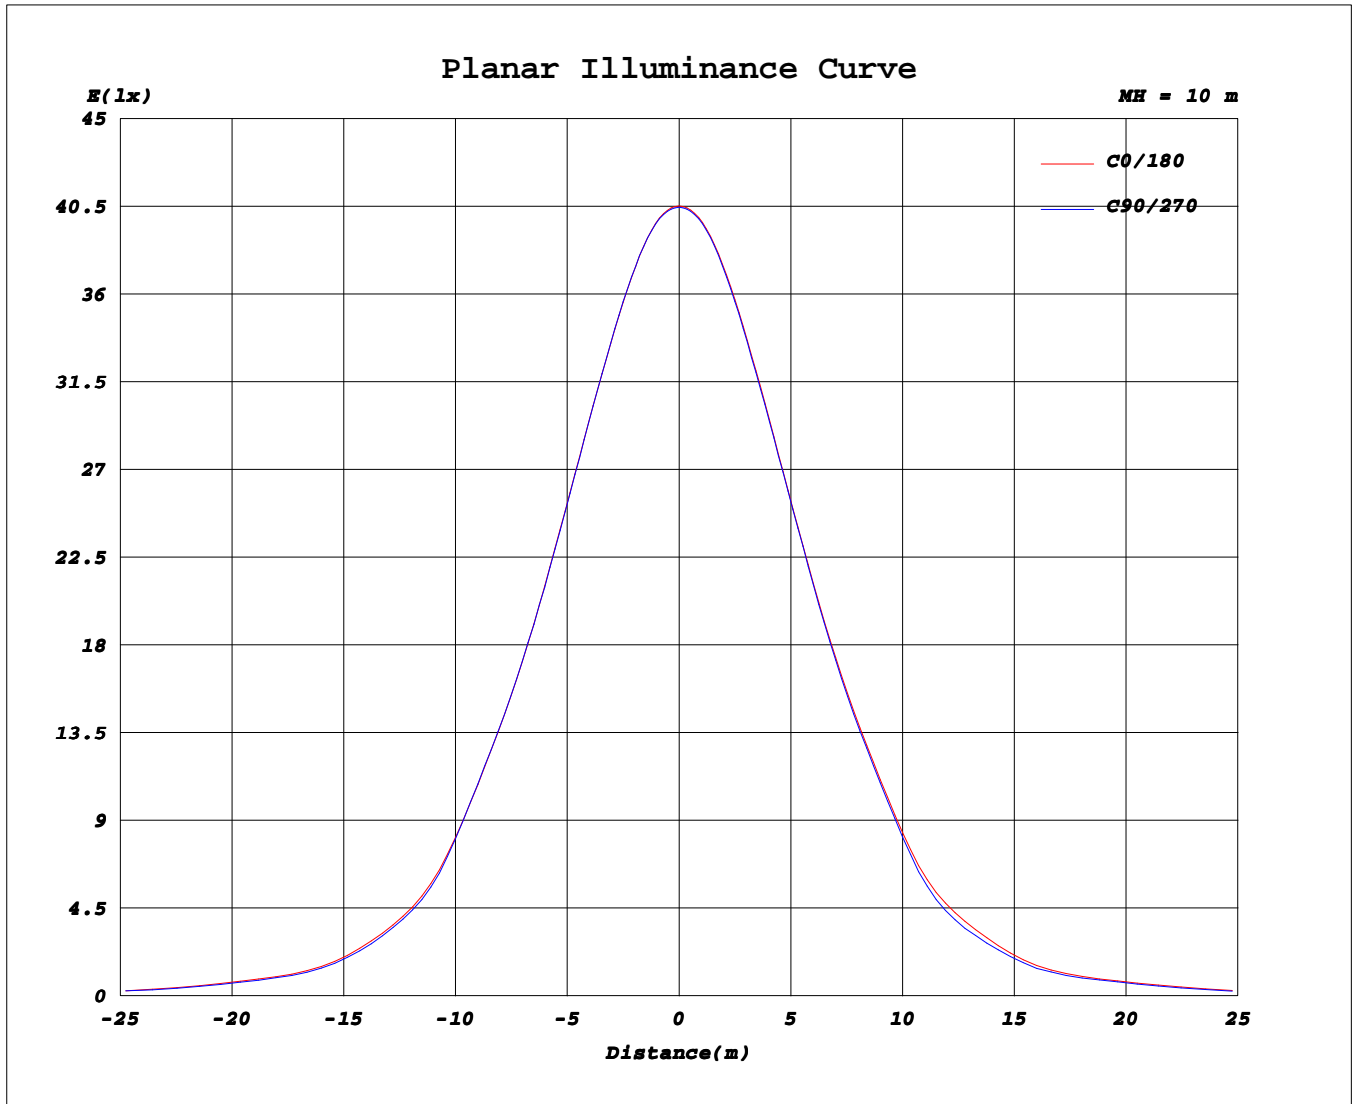

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr.Ma
Test Date: 2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:229.26V I:0.3235A P:71.723W PF:0.9671 Freq:49.99Hz Lamp Flux:9184.78x1 lm																	
NAME: Compo 900 75W NW									TYPE:			WEIGHT:					
SPEC.:									DIM.:			SERIAL No.:					
MFR.: PURATI PTY LTD									SUR.:			Shielding Angle:					

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	4046	4046	4046	4046	4046	4046	4046	4046	4046	4046	4046	4046						
5	4031	4027	4026	4033	4033	4029	4034	4037	4039	4035	4034	4036						
10	3969	3962	3961	3977	3977	3970	3979	3985	3990	3978	3977	3982						
15	3869	3860	3859	3877	3881	3871	3885	3894	3898	3882	3879	3886						
20	3744	3730	3727	3750	3754	3742	3762	3774	3778	3754	3751	3761						
25	3590	3568	3563	3593	3599	3581	3606	3628	3627	3605	3593	3609						
30	3383	3354	3346	3385	3392	3368	3404	3430	3427	3395	3385	3412						
35	3120	3097	3084	3126	3131	3116	3154	3178	3184	3136	3130	3153						
40	2812	2782	2762	2816	2822	2800	2857	2882	2890	2829	2827	2844						
45	2299	2238	2186	2282	2304	2262	2366	2426	2407	2304	2273	2357						
50	1721	1716	1653	1663	1662	1712	1793	1805	1786	1654	1612	1741						
55	1298	1265	1218	1229	1241	1276	1366	1408	1433	1255	1261	1320						
60	904	877	864	854	869	878	923	959	922	842	854	872						
65	706	665	631	670	676	678	745	761	755	690	687	729						
70	450	453	448	455	453	457	483	476	489	443	447	450						
75	343	329	317	335	351	331	358	375	367	337	349	340						
80	223	206	192	225	225	218	238	253	250	227	219	236						
85	95.6	83.7	79.4	98.6	103	94.5	113	124	126	105	105	110						
90	1.32	1.30	1.30	1.23	1.34	1.26	1.93	7.35	9.01	1.61	1.50	1.96						
95	1.76	1.80	1.80	1.67	1.67	1.74	1.95	1.90	1.86	1.94	1.94	1.92						
100	2.39	2.43	2.42	2.27	2.24	2.34	2.50	2.46	2.41	2.47	2.48	2.47						
105	3.15	3.18	3.18	2.98	2.95	3.08	3.20	3.14	3.08	3.15	3.15	3.14						
110	4.00	4.00	4.04	3.81	3.78	3.93	3.98	3.94	3.87	3.96	3.92	3.94						
115	4.79	4.79	4.80	4.56	4.58	4.76	4.76	4.71	4.63	4.73	4.71	4.70						
120	5.38	5.39	5.34	5.19	5.24	5.42	5.35	5.32	5.24	5.33	5.32	5.28						
125	5.76	5.74	5.68	5.59	5.66	5.84	5.66	5.67	5.63	5.69	5.69	5.63						
130	5.95	5.88	5.83	5.78	5.87	6.03	5.72	5.83	5.81	5.84	5.85	5.80						
135	6.04	5.90	5.88	5.84	5.94	6.10	5.71	5.88	5.86	5.88	5.88	5.85						
140	6.11	5.91	5.92	5.88	5.99	6.16	5.73	5.91	5.89	5.91	5.91	5.89						
145	6.23	5.98	6.04	5.99	6.11	6.31	5.82	6.01	5.99	6.02	6.02	5.99						
150	6.41	6.15	6.20	6.28	6.35	6.53	6.03	6.24	6.23	6.25	6.27	6.21						
155	6.45	6.23	6.28	6.45	6.50	6.56	6.15	6.37	6.41	6.38	6.44	6.35						
160	6.51	6.26	6.37	6.56	6.58	6.54	6.21	6.46	6.53	6.47	6.53	6.47						
165	6.64	6.25	6.47	6.63	6.58	6.51	6.33	6.49	6.61	6.70	6.48	6.57						
170	6.66	6.27	6.57	6.67	6.59	6.53	6.53	6.76	6.94	6.79	6.49	6.63						
175	6.69	6.39	6.68	6.75	6.64	6.65	6.61	6.63	6.80	6.71	6.57	6.70						
180	6.70	6.53	6.74	6.77	6.67	6.76	6.71	6.53	6.74	6.77	6.67	6.75						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks: