

## DESCRIPTION

### IP54 surface mounted adjustable downlight with minimalistic design and versatile application

The Fuoco Series comprises of two classic shapes (Round · Square) with multiple mounting options that are suitable for both consumer and professional applications. With a minimal design and quality light output this downlight brings a modern, eye-pleasing and elegant look to the space. Precisely designed and engineered turning lock system makes this downlight interchangeable low glare reflector with three different beam angles to meet your project requirements.



## QUICKINFO

### GENERAL

Finish	Black (RAL 9005)
Material	Die-cast Aluminium
IP	54
Lifespan	L90/50,000h
Warranty	5 years

### LED


Optic	15° / 24° / 36° / 60° Reflector
Lumen	890lm
Efficacy	Up to 86lm/W
CRI	3000K
CCT	>92
SDCM	<3
UGR	<16

### ELECTRICAL

Voltage	220-240V
Power	10W
Driver Build-in (Flicker-Free)	Phase cut

### ACCESSORIES

Glass diffuser or honeycomb louver

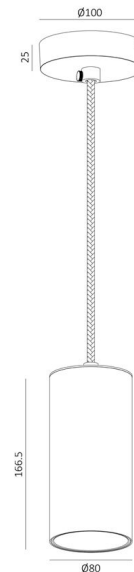

BEAM 15° / 24° / 36° / 60°	CRI>92	SDCM<3	IP54	IK10	IC-4	5 YEARS	
----------------------------	--------	--------	------	------	------	---------	--

## DESCRIPTION

### IP54 surface mounted adjustable downlight with minimalistic design and versatile application

The Fuoco Series comprises of two classic shapes (Round · Square) with multiple mounting options that are suitable for both consumer and professional applications. With a minimal design and quality light output this downlight brings a modern, eye-pleasing and elegant look to the space. Precisely designed and engineered turning lock system makes this downlight interchangeable low glare reflector with three different beam angles to meet your project requirements.



## QUICKINFO

### GENERAL

Finish	White (RAL 9016)
Material	Die-cast Aluminium
IP	54
Lifespan	L90/50,000h
Warranty	5 years

### LED


Optic	15° / 24° / 36° / 60° Reflector
Lumen	915lm
Efficacy	Up to 89lm/W
CRI	3000K
CCT	>92
SDCM	<3
UGR	<16

### ELECTRICAL

Voltage	220-240V
Power	10W
Driver Build-in (Flicker-Free)	Phase cut

### ACCESSORIES

Glass diffuser or honeycomb louver

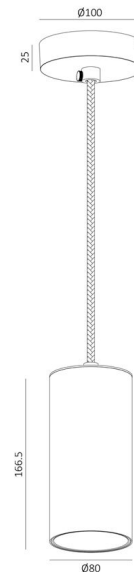

BEAM 15° / 24° / 36° / 60°	CRI>92	SDCM<3	IP54	IK10	IC-4	5 YEARS	
----------------------------	--------	--------	------	------	------	---------	--